MAX CAPACITY 0,9 t



Edition 01/2016 © 2016 JMG Cranes srl All rights reserved





JMG Cranes s.r.l. a socio unico "Società sottoposta ad attività di direzione e coordinamento di Compart Italia srl"

Sede Legale: Via Dante, 15 - 26100 CREMONA I Uffici e stabilimento: Via Sito Nuovo, 14 - 29010 Sarmato - PC - Italy C.F. e p.iva 05896090965 I Capitale Sociale Euro 84.000,00 i.v. T +39 0523 8486 I F. +39 0523 848000 I E. info@jmgcranes.com I www.jmgcranes.com





GREENLIFTER 0,9 t

DRIVING:	Manual
STEERING:	Rear by steering helm allowing a 90°+90° steering angle
BOOM CONTROLS:	Electrohydraulic controls - cable remote control power line alimented
FRAME:	Fabricated from preformed and welded steel plate
WHEELS:	Front nr. 2 polyurethane 250x60

Rear nr. 2 polyurethane 250x60


Manual parking brake on front wheels

Front outriggers complete with 250 x 60 vulkollan wheels



ASSEMBLED

DISMOUNTABLE FOR EASY HANDLING AND TRANSPORT

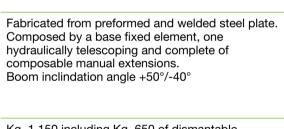



DISMOUNTABLE COUNTERWEIGHTS OF 25Kg/each

WEIGHT: Kg. 1.150 including Kg. 650 of dismantable counterweights. To simplify the handling the crane is dismountable in parts easily and quickly assemblable, the equipment is complete by remouvable counterweights, each one weighting The crane is complete by service rubber 250 x 50 wheels **OPTIONS** ATEX conversions, customer painting ON REQUEST:



HYDRAULIC BOOM WITH MANUAL EXTENSIONS

CRANE CLASSIFICATION ACCORDING TO UNI ISO 4301-1:

OUTRIGGERS:

BRAKE:

BOOM:


А3


EU STANDARD CE: 2006/42 CE MD - 2004/108 CE EMC - 2006/95 CE LVD - 2000/14 CE and subsequent modifications


REFERENCE **STANDARDS:** EN 13000: 2010 UNI ISO 4301-2:2011 and subsequent modifications


DIMENSIONS


PERFORMANCES

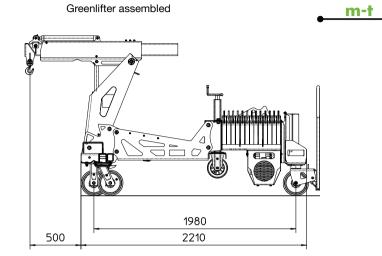




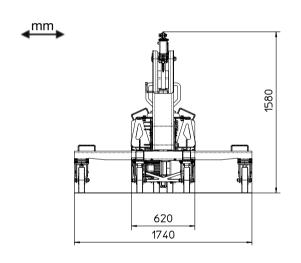

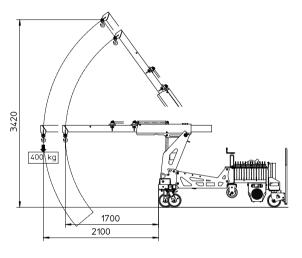





Greenlifter disassembled

